


REVISION HISTORY			
LEVEL	DESCRIPTION	DATE	APP

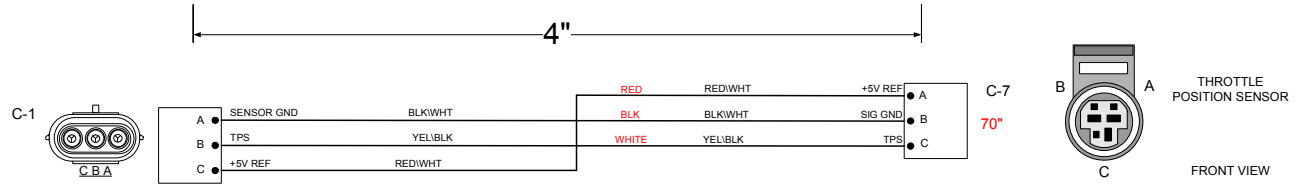

C-7M THROTTLE POSITION SENSOR PIGTAIL			
QTY	DESCRIPTION	PCS P/N	NOTES
1	CONNECTOR	CON-2307	F/M
2	TERMINALS	CON-1011	M 20 AWG
2	CABLE SEALS	CON-1004	V/O
1	PLUG	CON-0999	GRN

C-2 THROTTLE POSITION			
QTY	DESCRIPTION	P/N	NOTES
1	CONNECTOR	CON-2328	
3	TERMINAL	CON-2329	22-20 awg

WIRE COLOR ABBREVIATIONS		
TXI	COLOR	NOTES
BLK	BLACK	
BRN	BROWN	
RED	RED	
ORN	ORANGE	
YEL	YELLOW	
LT.GRN	LIGHT GREEN	
GRN	GREEN	
LT.BLU	LIGHT BLUE	
BLU	BLUE	
VIO	VIOLET	
GRY	GRAY	
WHT	WHITE	
PNK	PINK	

Print Date
7/11/2018
1700

FULL FILENAME
\\PCSSSTORAGE\OLDZ\PCS PRODUCTS\TRANSMISSION CONTROLLERS\WRE-8013-001 TPS ADAPTER\WRE-8013 ADAPTER KIT TO GM ROUND KIT .VSD

APPLICABLE STANDARDS
 • ASME Y14.100-200
 • ASME Y14.5M-1994
 • IPC/WHMA-A-620A-CLASS 2
 • MARK IAW MIL-STD-130.

NOTES:
 1.) WIRE LENGTH TOLERANCE +/- .12 INCH
 2.) WIRE GAUGE IS 20 AWG UNLESS OTHERWISE STATED
 3.) TAPE ALL LOOM JOINTS UNLESS OTHERWISE STATED
 4.) TWIST INDICATED WIRES AT LEAST 10-12 TURNS PER FOOT
 5.) PLACE TAGS NO MORE THAN 2" FROM CONNECTOR. PLACE TAGS FOR UNTERMINATED WIRES NO MORE THAN 2" FROM UNTERMINATED END.
 6.) WIRE TYPE IS TXL UNLESS OTHERWISE STATED.

COMPANY:
POWERTRAIN CONTROL SOLUTIONS

TITLE:
3 WAY WEATHER-PACK TO 3 WAY METRI-PACK TPS ADAPTER HARNESS

SIZE: C	CUSTOMER DRAWING NO. XXXXXX-XXXXX	PCS PART NUMBER WRE-8013	REV: 001
DRAWN BY: FRED D.		DATE: XXXXXX	APPROVED BY: XXXXXX
DATE:		DATE:	SHEET 2 OF 3